




## Cubunt-C

25 x 25 x 3 mm H3

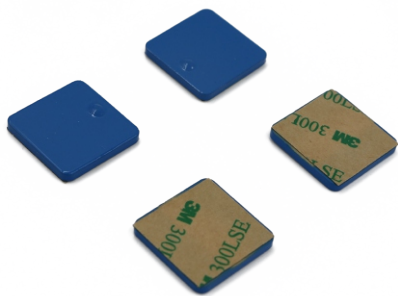

The RFID Ceramic Tag is a compact, high-performance RFID transponder designed for reliable operation in harsh industrial environments. Built on a high-dielectric ceramic substrate, the tag delivers excellent RF stability, superior performance on metal surfaces, and long-term durability under extreme conditions, such as wetness, high temperature, chemicals, etc.

They can be attached to objects for various applications, such as inventory management, supply chain tracking, asset tracking, aerospace, chemical, automotive, and manufacturing, and product authentication.

### Highlights & Benefits

- ✓ Superior RF, thermal and mechanical stability
- ✓ Resistant to heat, moisture, chemicals, ray
- ✓ Longer lifespan even in harsh environments
- ✓ Miniaturization, long read range even small size
- ✓ Sterilizable and biocompatible

### Applications



- ✓ Medical device
- ✓ Equipment & tool



## Technical Features

Model	RCC6001
<b>RFID Features</b>	
Air Interface Protocol	EPC Class 1 Gen 2 / ISO 18000-63 Type C
Frequency	860-960 MHz
Chip Type	Alien Higgs 3
Memory	User - 512 bits; EPC - 96 bits; TID - 96 bits
Data Storage	> 10 years
Re-write	100,000 times
Read Range(2W ERP)	ETSI: > 8.5 m(27.9 ft) , on metal
<b>Physical Features</b>	
Dimension	25 x 25 x 3 mm / 0.98 x 0.98 x 0.12 in
Material	Ceramic
Weight	8.6 g
Color	Black / Gray / Blue / White
Operating Temperature	-40°C to 85°C / -40°F to 185°F
Survival Temperature	-40°C to 250°C / -40°F to 482°F
Storage Condition	20±5°C, 50±10% RH, Store away from sunlight
IP Rate	IP68, test for 5 hours at 1m deep water
<b>Other Features</b>	
Installation	Adhesive(clean and dry surface), Rivet, Magnet, Screw
Customization	Printing, Encoding, Design, etc.
Package	Packed with plastic tray, 50 pcs/ tray

### Radiation Pattern

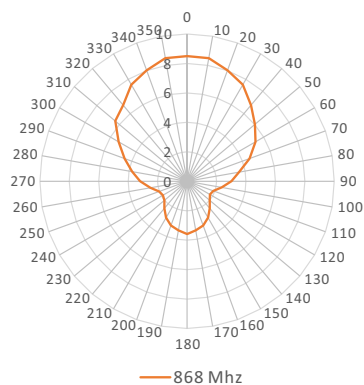

PS: The performance is theoretical values in the lab and the actual effect depends on the specific applications.

**RICHRFID**

Web: <https://www.richrfid.com> E-mail: [info@richrfid.com](mailto:info@richrfid.com)  
 Shenzhen | Hong Kong | Singapore | Seoul | Tokyo | Paris



#### DISCLAIMER

All specifications are indicative and results may vary. Each user bears full responsibility for making its own determination as to the suitability of RICHRFID products, materials, services, recommendations, or advice for its own particular use.

For intended use only. Not to be repurposed or used for other applications without prior written permission from the manufacturer.

@2026 RICHRFID. All rights reserved.