

## 26 x 11 mm ICODE Inlay/Label

This inlay meets with ISO15693 standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

### Physical Features:

Antenna Size:	26 x 11 mm
Wet Inlay/Label Size:	30 x 15 mm(customized)
Label Material:	Coated Paper/PET/Fragile Paper
Working Temp:	-40~+85°C
Storage Temp:	23 ± 3°C
Storage Humidity:	50 ± 15%RH


### RFID Features:

RFID Standard:	ISO15693
Chip Type:	NXP Icode SLIX/SLIX2/SLIX-S/SLIX-L/SLI/SLI-S
Memory:	1024/2560/2048/512/1024/2048 bits
Read Range(Fixed Reader):	0~1.0 m

### Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Logo, barcode/QR code, number printing, encoding, design, etc.
Package:	Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton
Application:	<ul style="list-style-type: none"> <li>• IT asset Tracking</li> <li>• Library management</li> <li>• Document tracking management</li> <li>• Dangerous goods management, etc</li> </ul>

## Dimensions:

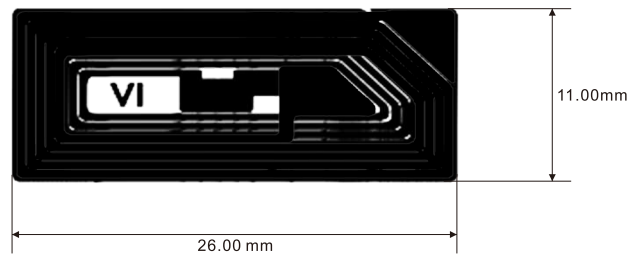

## Application:

