



58.5 x 21 mm Anti Liquid label

This inlay/label is compatible with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz. Each tag has a unique TID. It can be used on metal and liquid-filled container via hang paste way, then very suitable to track and manage wine, cosmetic, perfume, blood bag, IT assets, electronic product, metal items, etc

Physical Features:

Model:	RC5055
Material:	PET
Dimensions:	58.5 x 21 mm(customized)
Working Temp:	-40~+85°C
Storage Temp:	23±3 °C
Storage Humidity:	50±15 %RH
IP Code:	IP68, test for 5 hours at 1m deep water


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP UCode 8/9
Memory:	U8: User - N/A; EPC - 128 bits; TID - 96 bits U9: User - N/A; EPC - 96 bits; TID - 96 bits
Read Range(Fixed Reader FCC):	7.0 m, on liquid
Read Range(Fixed Reader ETSI):	9.0 m, on liquid

Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Support Printer:	SATO CL4NX, Zebra ZT410 Silverline, Postek TX3r, etc.
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Package:	Reel core inner diameter: 76.2 mm / 3", Outside diameter < 220 mm / 8.7", 1000-5000 pcs/roll.
Application:	• Liquid container management • Cosmetic management • Wine management • Pharmaceutical management, etc.


Dimensions:

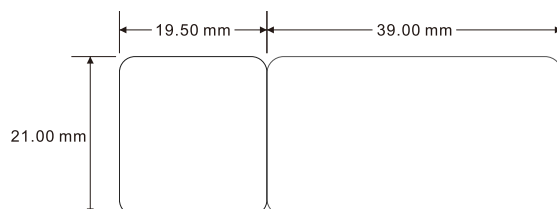

User's Guide:



Read Range(on liquid):

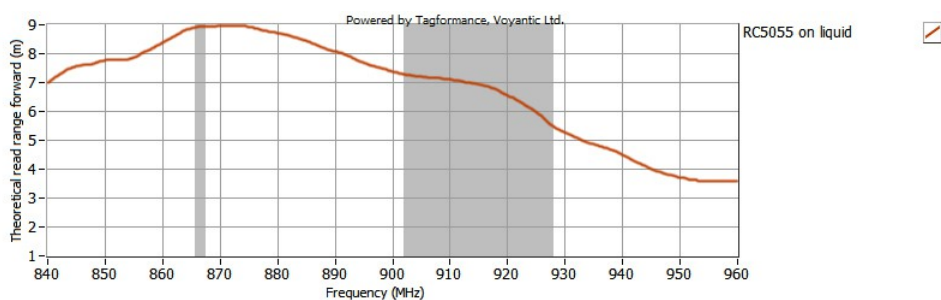

Application:

