


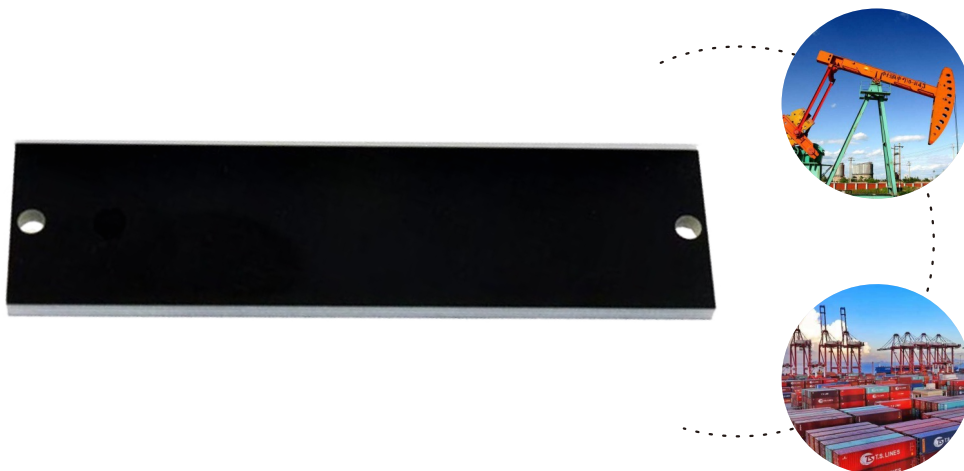

Long Range UHF PCB On-metal Tag

The tag is based on FR-4 materials with IP68 rated, it has super reliability and durability, high temperature resistant, suitable for different harsh environments. It could be installed via screw, rivet, adhesive, etc and it is compatible with the protocol ISO18000-6C (EPC C1G2) with unique global ID, suitable for different assets tracking and management.

Physical Features:

Model:	RCP8002
Material:	FR-4
Color:	Black
Dimensions:	95 x 25 x 3 mm(L x W x T)
Weight:	14.6 g
Working Temp:	-40~+85°C
Storage Temp:	-40~+150°C
IP Code:	IP68


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP UCode 8
Memory:	User - N/A; EPC - 128 bits; TID - 96 bits
Read Range(Fixed Reader):	FCC - 12.5 m, on metal; ETSI - 12 m, on metal
Read Range(Handheld Reader):	FCC - 9.0 m, on metal; ETSI - 8.0 m, on metal


Other Features:

Data Storage:	> 20 years
Re-write:	100,000 times
Installation:	3M adhesive, Rivet, Magnet, Screw
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Package:	100 pcs/bag
Application:	• Electricity and railway management • Industry automation management • Metallic Asset management • Shelf and tower management, etc

Dimensions:

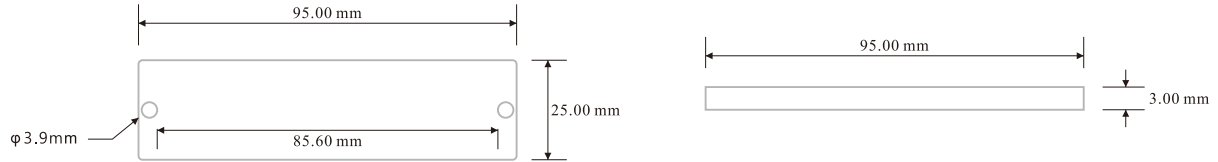

Read Range:

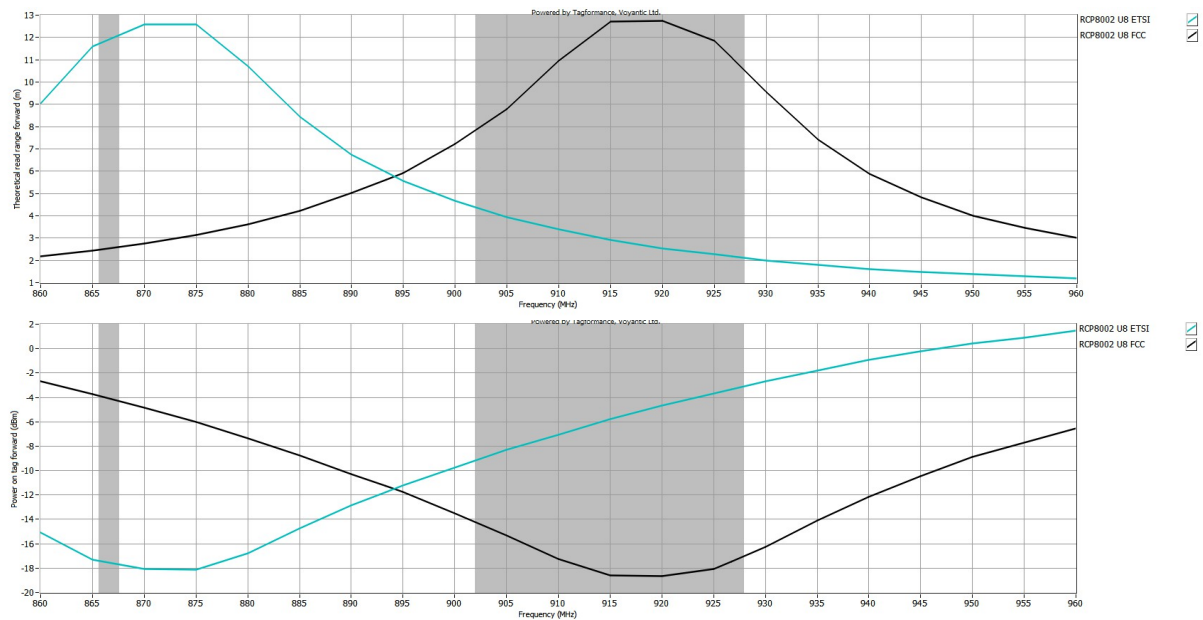

Application:

