

RFID UHF Tire Label

This label is compliant with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz (It can be used worldwide). Each tag has a unique TID and is unchangeable. This label is specially designed for tire and has very good performance even metal inside the tire. Besides, it uses the adhesive which is special for tire

Physical Features:

Model:	RC9022
Material:	Coated paper/PET
Dimensions:	42.4 x 9 mm
Working Temp:	-40~+85°C
Storage Temp:	-40~+100°C


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	Alien Higgs 10
Memory:	User-96 bits; EPC-32 bits; TID-48 bits
Read Range(Fixed Reader):	FCC:5.3 m, on plastic
Read Range(Handheld Reader):	FCC:2.5 m, on plastic


Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Application:	<ul style="list-style-type: none"> • Tire tracking • Rubber tracking • Logistics management • Assets management, etc

Dimensions:

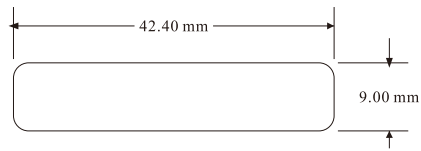

Read Range:

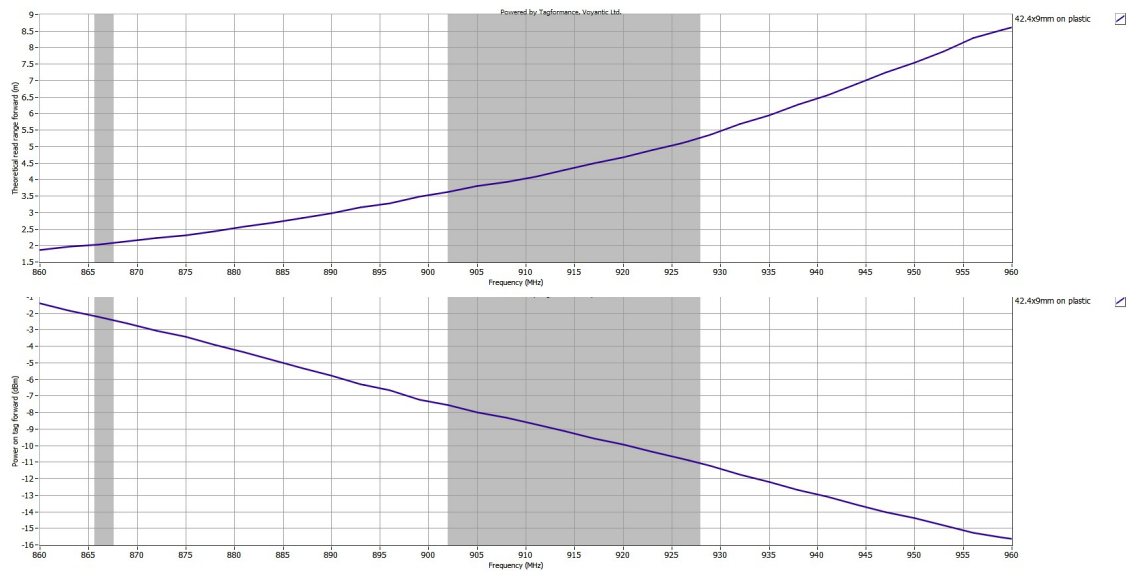

Application:

