

42 x11 mm MR6 Inlay/Label

This inlay is compatible with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860~960MHz. Each tag has a unique ID and stores user data. It is designed for use in jewelry and small items applications where the tag may be in close proximity to small metal or metallic coated objects. It can be used for brand anti-counterfeiting, inventory counting, anti-theft tracking, etc.

Physical Features:

Antenna Size:	42 x11 mm
Wet Inlay/Label Size:	63 x 18 mm(customized)
Label Material:	Coated Paper/PET/Fragile Paper
Working Temp:	-40~+85°C
Storage Temp:	23 ± 3°C
Storage Humidity:	50 ± 15%RH


RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	Impinj Monza R6/R6P
Memory:	R6: User - N/A; EPC - 96 bits; TID - 48 bits R6P: User - 32(64) bits; EPC - 128(96) bits; TID - 48 bits
Read Range(Fixed Reader):	4.0m


Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Customization:	Logo, barcode/QR code, number printing, encoding, design, etc.
Package:	Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton
Application:	<ul style="list-style-type: none"> ● Retail management ● Jewelry management ● Document management ● Assets management, etc.

Dimensions:

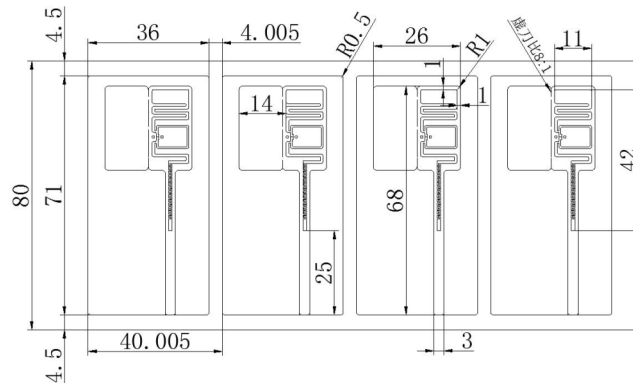

Read Range:

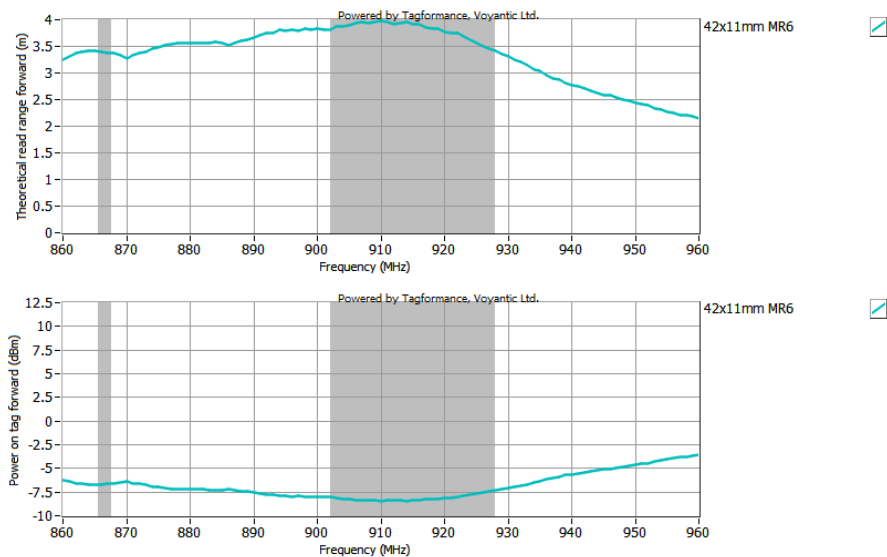

Application:

