



BendPlas Wide H10

65 x 35 mm

The BendPlas Wide H10 from RICHRFID is an adhesive, flexible, smart RFID label, designed specifically to identify, locate, and manage physical assets automatically. It enables fast, contactless scanning of multiple items at once often from several meters away without requiring a line of sight, making it far more efficient than traditional barcodes.

Featuring a specially formulated strong adhesive for secure asset attachment and a material resistant to moisture, common chemicals, and water, the label also allows customization with text, logos, barcodes, QR codes, Data Matrix codes, etc., for visual identification.

By enabling accurate, real-time visibility without manual counts, it reduces losses, optimizes utilization, slashes labor costs, and provides data for smarter business decisions. The key to success is selecting the right label for your specific assets and environment, and integrating the data into your management systems.

Applications

Non-metal Asset Management: tables, chairs, cabinets, sofas, documents, archives, etc.


Overview

Frequency Band
UHF 860-960 MHz

Chip Type
Alien Higgs 10

Dimensions
65 x 35 mm / 2.56 x 1.38 in

Air Interface Protocol
ISO/IEC 18000-63 Type C

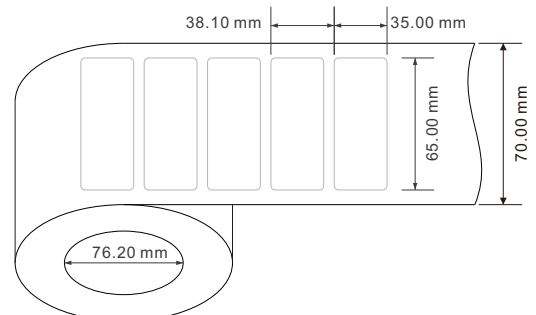


Technical Features




Model	RC5803
RFID Features	
Air Interface Protocol	UHF EPC Class 1 Gen 2, ISO 18000-63 Type C
Frequency	860-960 MHz
Application	Non metal
Chip Type	Alien Higgs 10
EPC	Up to 128 bits (nominally 96 bits)
User	Up to 32 bits (with 96 bits EPC)
TID	96 bits
Data Storage	> 10 years
Re-write	100,000 times
Physical Features	
Dimension	65 x 35 mm / 2.56 x 1.38 in
Material	PET
Adhesive	Double-sided tape
Operating Temperature	-40°C to 85°C / -40°F to 185°F
Storage Condition	20±5°C, 50±10% RH, Store away from sunlight
Other Features	
Installation	Adhesive on clean & dry surface
Customization	Printing, Encoding, Designing, etc.
Package	2,500 pcs / roll, 4 rolls / box

Read Range(2W ERP)

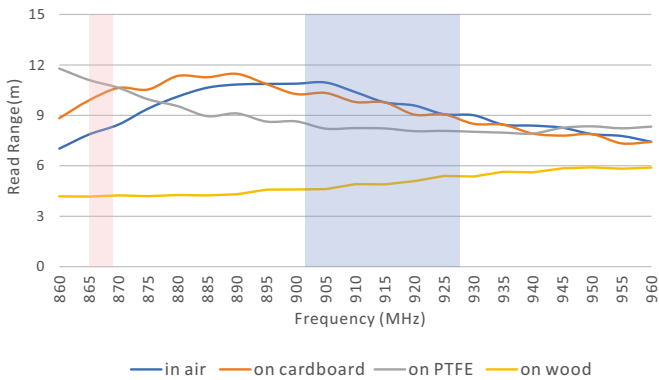

Radiation Pattern

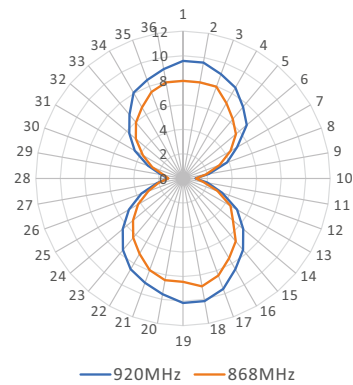

PS: The performance is theoretical values in the lab and the actual effect depends on the specific applications.

RICHRFID

Web: <https://www.richrfid.com> E-mail: info@richrfid.com
Shenzhen | Hong Kong | Singapore | Seoul | Tokyo | Paris



DISCLAIMER

All specifications are indicative and results may vary. Each user bears full responsibility for making its own determination as to the suitability of RICHRFID products, materials, services, recommendations, or advice for its own particular use.

For intended use only. Not to be repurposed or used for other applications without prior written permission from the manufacturer.

@2026 RICHRFID. All rights reserved.